

EL ELR



We inform that the cookies used in this website are “technical cookies” necessary in order to improve browsing, but also “analysis cookies” to make statistical analyses and “third party cookies”. You can get more details and block the use of all or just some cookies, reading the extendeded privacy policy. If you continue browsing this site, it is implied that you express your consent to the use of the aforementioned cookies.








I AgreeRead More

Pumps | Accessories | Applications and Uses | More Informations

EL – ELR

- Pump body: spheroidal cast iron
- Head: spheroidal cast iron with chemical nickel plating
- Camshaft: forged steel
- Splash lubrication
- Shaft support bearings oversized for long duration
- Connecting rods: steel with thin-shell bearings
- Guiding piston: stainless steel
- Solid ceramic plungers
- Suction/delivery valves in stainless steel
- Seals: high dependability, V profile
- Versions in direct drive mount or with side gearbox available in 2 gear ratios and positionable on the right or left of the pump at 30° – 90° – 150° from the horizontal plane (see drawing)

Routine maintenance includes easy operations such as: oil check & change, check and possible replacement of seals.

Models		Drawings			Chart			Installation Scheme			
Code	Model										
		rpm	l/min		US gpm	bar					psi
6905 0006	ELR 84/190	1000	84	22,2	190	2755	19	31,6	43	88	194
6908 0006	ELR 84/190	1500	84	22,2	190	2755	19	31,6	43	105	231,4
6908 0012	ELR 84/190	1900	84	22,2	190	2755	19	31,6	43	105	231,4
6905 0001	EL 102/160	1000	102	27	160	2320	16	31,6	43	88	194
6908 0001	ELR 102/160	1500	102	27	160	2320	16	31,6	43	105	231,4
6908 0007	ELR 102/160	1900	102	27	160	2320	16	31,6	43	105	231,4
6905 0002	EL 122/130	1000	122	32,2	130	1885	13	31,6	43	88	194
6908 0002	ELR 122/130	1500	122	32,2	130	1885	13	31,6	43	105	231,4
6908 0008	ELR 122/130	1900	122	32,2	130	1885	13	31,6	43	105	231,4
6905 0003	EL 128/120	850	128	33,8	120	1740	12	24,9	40	88	194
6908 0003	ELR 128/120	1275	128	33,8	120	1740	12	17,5	40	105	231,4
6908 0009	ELR 128/120	1615	128	33,8	120	1740	12	24,9	40	105	231,4
6905 0004	EL 152/100	800	152	40,1	100	1450	10	24,9	40	88	194
6908 0004	ELR 152/100	1200	152	40,1	100	1450	10	24,9	40	105	231,4
6908 0010	ELR 152/100	1520	152	40,1	100	1450	10	24,9	40	105	231,4
6905 0005	EL 164/90	700	164	43,3	90	1305	9	24,9	40	88	194
6908 0005	ELR 164/90	1050	164	43,3	90	1305	9	24,9	40	105	231,4
6908 0011	ELR 164/90	1330	164	43,3	90	1305	9	24,9	40	105	231,4


PULSE system on request

Max Inlet pressure: 3 bar – 43,5 p.s.i.

Oil Capacity: 4,00 l 15W 40

Oil Capacity with Gearbox 4,53 l 15W 40

Connection Kit

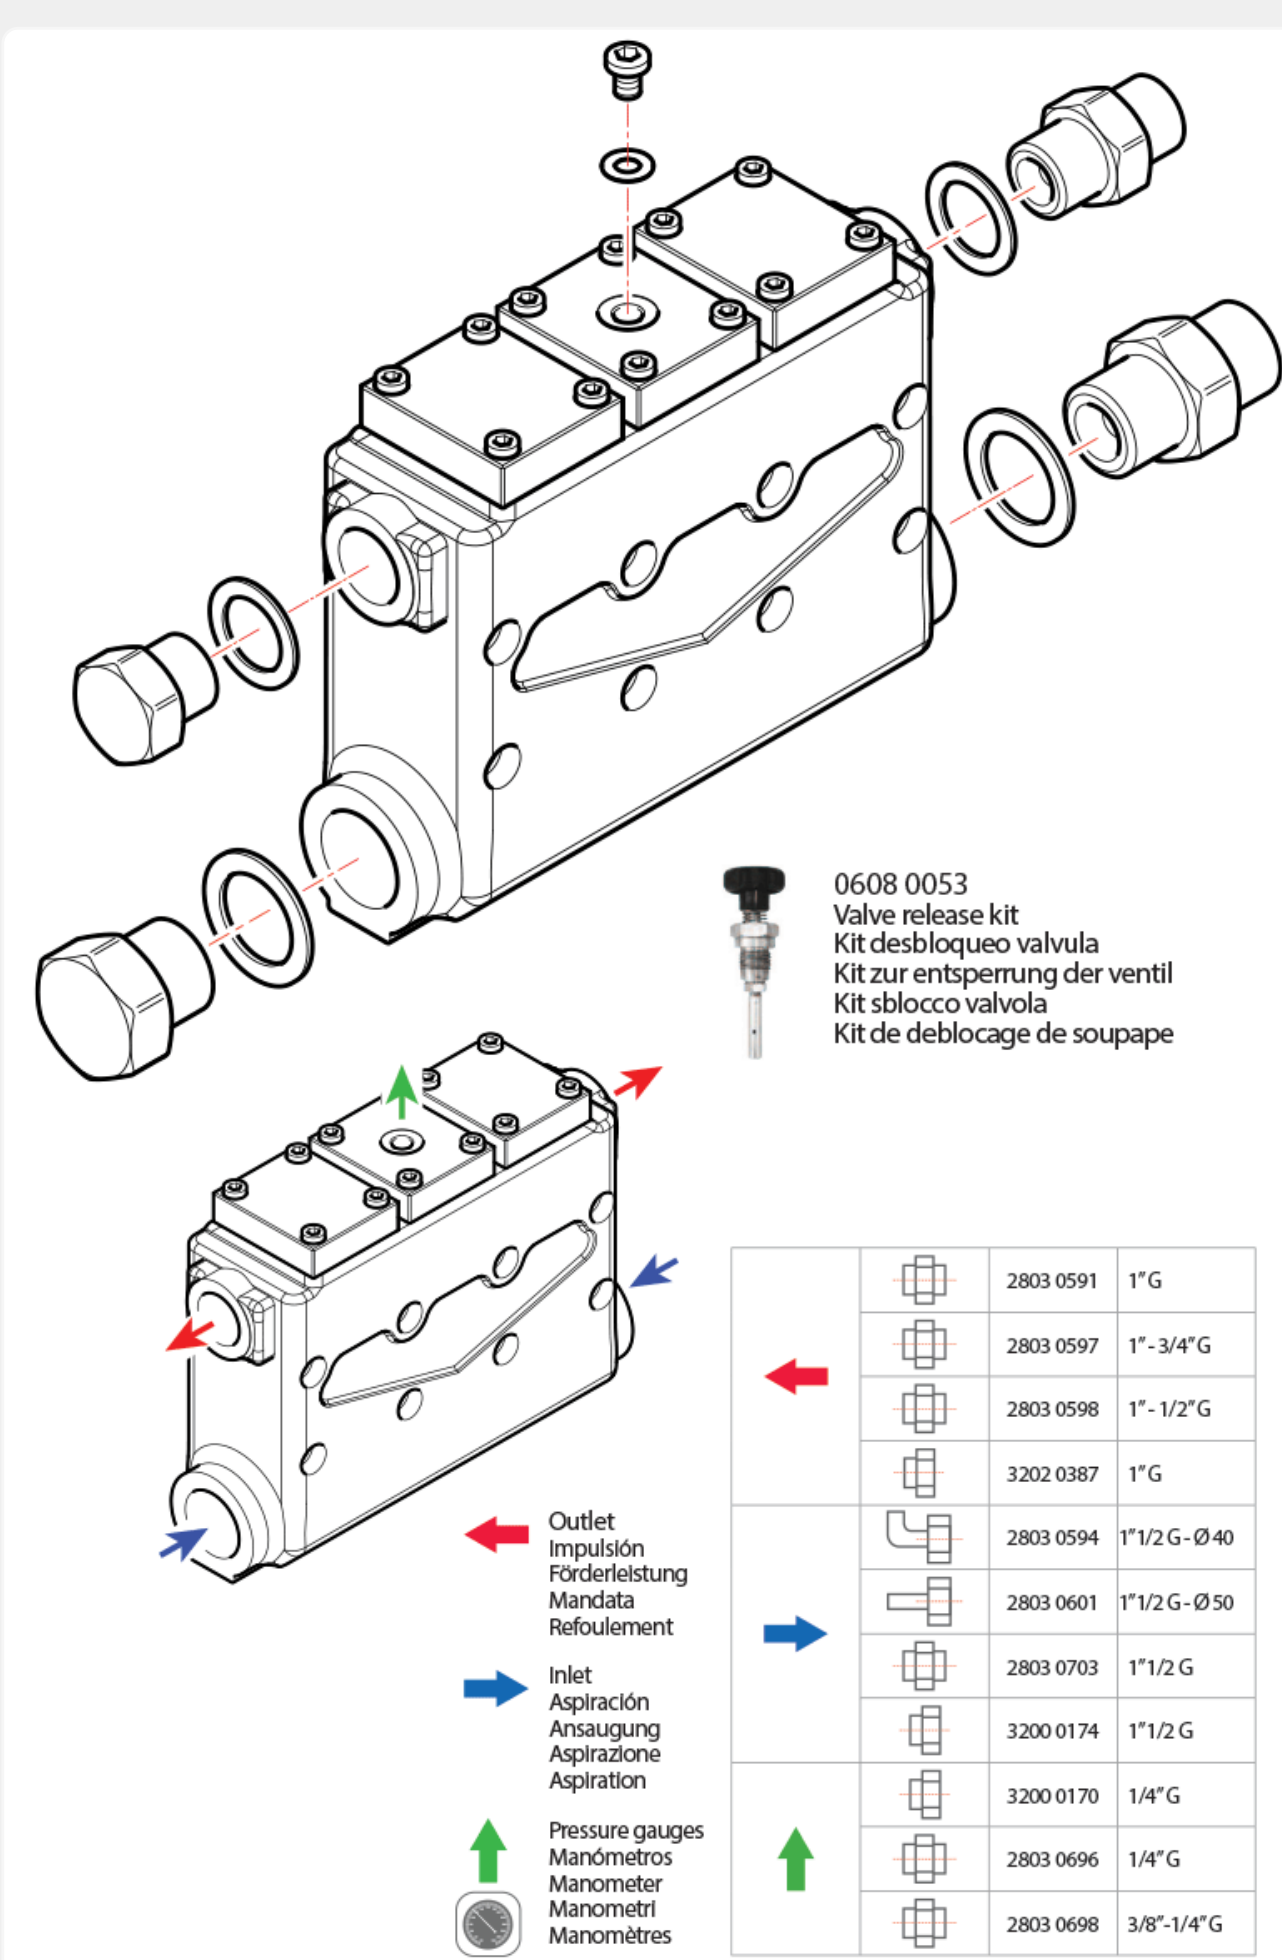

- Download Data Sheet
- Download Spare Parts
- Download Manual
- Download General Part

Accessories



Guns with Lances



Unloader Valves



Pulsation Dampeners

Applications and Uses

EL – ELR



MUNICIPALITIES



MILITARY

Contact us for more informations

Your Name (required)

Your Email (required)

Subject

Your Message

*In compliance with articles 7-8-9 of E.R. 2016/679 I declare that I have read the information and consent to the processing of data for the purposes as per point a)

☐ I authorize ☐ I do not authorize

Consent for "direct marketing" (this consent is optional). I declare that I have read the information and consent to the processing of data for the purposes as per point b) of this privacy policy and therefore consents to the receipt of advertising material/communications, such as brochures, invitations, newsletters, by post, e-mail, telephone, fax, sms and mms messages deriving from the Data Controller. It is herewith understood that the undersigned has the specific right to revoke this consent at any time, by contacting the Data Controller.

☐ I authorize ☐ I do not authorize

SEND

Share This Product, Choose Your Platform!

