

# ELH ELHR



We inform that the cookies used in this website are “technical cookies” necessary in order to improve browsing, but also “analysis cookies” to make statistical analyses and “third party cookies”. You can get more details and block the use of all or just some cookies, reading the extended privacy policy. If you continue browsing this site, it is implied that you express your consent to the use of the aforementioned cookies.

I AgreeRead More

Pumps | Accessories | Applications and Uses | More Informations

## ELH – ELHR

- Pump body: spheroidal cast iron
- Head: spheroidal cast iron with chemical nickel plating
- Camshaft: forged steel
- Splash lubrication
- Shaft support bearings oversized for long duration
- Connecting rods: steel with thin-shell bearings
- Guiding piston: stainless steel
- Solid ceramic plungers
- Suction/delivery valves in stainless steel
- Seals: high dependability
- Versions in direct drive mount or with side gearbox available in 2 gear ratios and positionable on the right or left of the pump at 30° – 90° – 150° from the horizontal plane (see drawing)

*Routine maintenance includes easy operations such as: oil check & change, check and possible replacement of seals.*

Models		Drawings	Chart	Installation Scheme
Code	Model			
		rpm l/min US-gpm	bar psi MPa	kW HP kg lb
6917-0008	ELH 30/600	1000 30 8	600 8700	60 36 66 149,9
6917-0010	ELHR 30/600	1500 30 8	600 8700	60 36 49 85 187,3
6917-0011	ELHR 30/600	1900 30 8	600 8700	60 36 49 85 187,3
6917-0001	ELH 38/500	1000 38 10	500 7250	50 36 49 66 149,9
6917-0002	ELHR 38/500	1500 38 10	500 7250	50 36 49 85 187,3
6917-0003	ELHR 38/500	1900 38 10	500 7250	50 36 49 85 187,3
6917-0012	ELH 47/400	1000 47 12,4	400 5800	40 36 49 66 149,9
6917-0013	ELHR 47/400	1500 47 12,4	400 5800	40 36 49 85 187,3
6917-0014	ELHR 47/400	1900 47 12,4	400 5800	40 36 49 85 187,3
6917-0004	ELH 59/310	1000 59 15,6	310 4500	31 36 49 66 149,9
6917-0005	ELHR 59/310	1500 59 15,6	310 4500	31 36 49 85 187,3
6917-0006	ELHR 59/310	1900 59 15,6	310 4500	31 36 49 85 187,3
6917-0007	ELH 70/280	1200 70 18	280 4000	28 36 49 66 149,9


Single shaft version available on request

Max Inlet pressure: 3 bar – 43,5 p.s.i.

Oil Capacity: 4,30 l – 15W 40

Oil Capacity with Gearbox 4,80 l – 15W 40

## Connection Kit

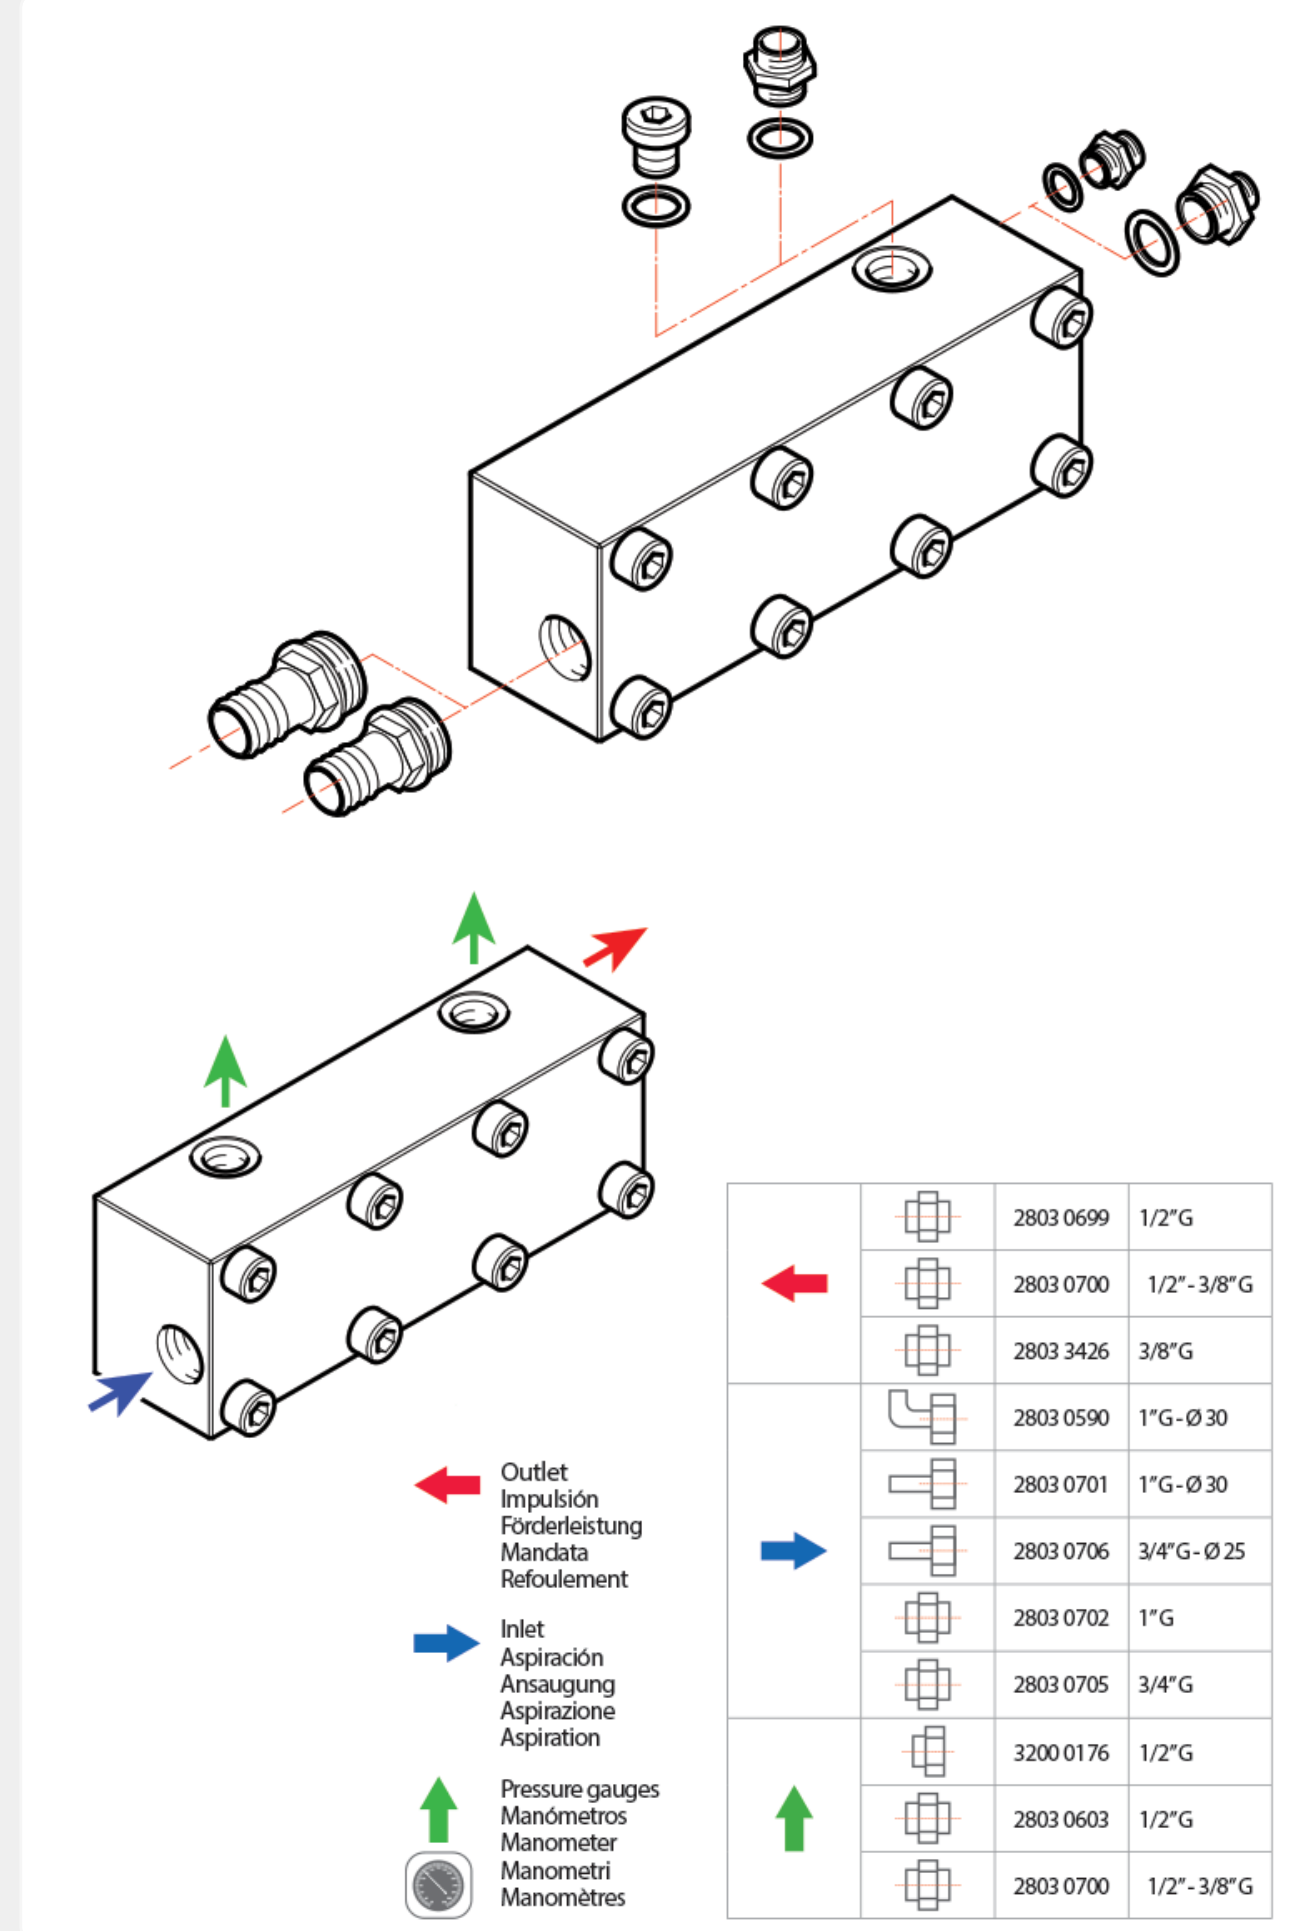

## Manuals

- [Download Data Sheet](#)
- [Download Spare Parts](#)
- [Download Manual](#)
- [Download General Part](#)

## Accessories



Guns with Lances



Unloader Valves



Pulsation Dampeners

## Applications and Uses

ELH – ELHR



MUNICIPALITIES



MILITARY



CHEMICAL PROCESSING



PETROCHEMICAL

Contact us for more informations

Your Name (required)

Your Email (required)

Subject

Your Message

\*In compliance with articles 7-8-9 of E.R. 2016/679 I declare that I have **read the information** and consent to the processing of data for the purposes as per point a)

☐ I authorize ☐ I do not authorize

Consent for "direct marketing" (this consent is optional). I declare that I have **read the information** and consent to the processing of data for the purposes as per point b) of this privacy policy and therefore consents to the receipt of advertising material/communications, such as brochures, invitations, newsletters, by post, e-mail, telephone, fax, sms and mms messages deriving from the Data Controller. It is herewith understood that the undersigned has the specific right to revoke this consent at any time, by contacting the Data Controller.

☐ I authorize ☐ I do not authorize

SEND

Share This Product, Choose Your Platform!

